

DATA SHEET:

# TS Blanca M3 9 (1.545) 2118



Governing Units: Metric

Mechanical Specifications	Metric		Imperial	
Fully Annealed Al Cross-sectional Area*	1072.96	mm <sup>2</sup>	2117.44	kcmil
Encapsulated Aluminum Cross-Sectional Area	103.80	mm <sup>2</sup>	0.16089	in <sup>2</sup>
Diameter of Composite Core (Exclude Encapsulation)	9.0	mm	0.35400	in
Cross-sectional Area of Core (Exclude Encapsulation)	63.60	mm <sup>2</sup>	0.09861	in <sup>2</sup>
Overall Diameter of Conductor	39.243	mm	1.545	in
Cross-sectional Area of the Conductor (Exclude Covering)	1136.60	mm <sup>2</sup>	1.76170	in <sup>2</sup>
Ultimate Tensile Strength of Conductor 1) ,2)	237.22	kN	53.33	kip
Rated Strength of Core - 399 ksi (2750 MPa)	174.90	kN	39.32	kip
Core Mass per unit length (Exclude Encapsulation)	111.00	kg/km	74.60	lb/kft
Conductor Mass per unit length	3077.89	kg/km	2068.60	lb/kft
Fully Annealed Al Mass per unit length (Include Encapsulation)**	2966.89	kg/km	1994.00	lb/kft
Maximum Emergency Temperature at Surface 3)	200	°C	392	°F
Coefficient of Linear Expansion Above Thermal Kneepoint (core)	0.500	x10 <sup>-6</sup> /°C	0.278	x10 <sup>-6</sup> /°F
Coefficient of Linear Expansion Below Thermal Kneepoint (conductor)	19.900	x10 <sup>-6</sup> /°C	11.056	x10 <sup>-6</sup> /°F
Final Modulus of Elasticity Above Thermal Kneepoint (based on core area)	150.0	GPa	21.8	Msi
Final Modulus of Elasticity Below Thermal Kneepoint (based on conductor area)	60.3	GPa	8.7	Msi
Aluminum Heat Capacity	2750.4	Watt-s/m-°C	465.7	Watt-s/ft.°F
Core Heat Capacity	94.1	Watt-s/m-°C	15.9	Watt-s/ft.°F
Encapsulation Thickness	2.80	mm	0.11024	in
Stranding Ratio	1.0275			
Covered Thickness	0.000	mm	0.000	in
Electrical Specifications	Metric		Imperial	
DC Resistance at 20°C (Fully Annealed Al 63% IACS)	0.0261	ohm/km	0.0421	ohm/mile
DC Resistance at 25°C	0.0267	ohm/km	0.0429	ohm/mile
DC Resistance at 75°C	0.0320	ohm/km	0.0515	ohm/mile
Temperature Coefficient of Resistance at 20°C	0.00408	1/°C	0.00227	1/°F
Frequency	60	Hz	60	Hz
AC Resistance at 25°C	0.0298	ohm/km	0.0480	ohm/mile
AC Resistance at 75°C	0.0347	ohm/km	0.0558	ohm/mile
AC Resistance at 180°C	0.0450	ohm/km	0.0723	ohm/mile
Ampacity 4)		2791	@180°C, & A	
		2958	@200°C, & A	
GMR (estimated)	15.61	mm	0.0512	ft
Inductive Reactance (Xa: internal flux+external flux radius 1 ft)	0.2241	ohm/km	0.361	ohm/mile
Capacitive Reactance	0.1309	Mohm-km	0.081	Mohm-mile

\*TS Blanca M3 9 (1.545) 2118 conductor is produced with Fully Annealed Al aluminum. The nominal Aluminum equivalent area is 1073 sq. mm (2117.4 kcmil)

\*\*TS® Conductors are required to exhibit lay lengths (ratios) that conform to established ACSR and ACSS standards.

- 1) Fully Annealed Al rated tensile strength based on applicable standard. Core tensile strength based on 100% of its strength.
- 2) Strength at ambient temperature. Strength may be reduced to Rated Core Strength when temperature is above knee point
- 3) Maximum continuous operating temperature of TS Blanca M3 9 (1.545) 2118 is 180°C and a maximum emergency temperature of 200°C
- 4). Ampacity based on: 25°C ambient temperature, 2ft/s (0.6 m/s) perpendicular wind, 0.5 Emis 0.5 Absorb.60 Hz, sea level (0) elevation, 30°N line Azimuth, noon on June 10th (96W/sq.ft, 1033W/sq.m), clear atmosphere

The information contained herein is offered in good faith. All values are nominal unless specifically indicated as maximum or minimum. The actual configuration of a given size may vary between conductor manufacturers and may result in slight variations in some of the indicated values. Data herein is to be considered confidential and proprietary to TS Conductor


contact: info@tsconductor.com

ID:29621

Date Produced: 12/5/2023

# TS<sup>®</sup> Conductor Blanca Cross sectional drawing

Expected value at production time

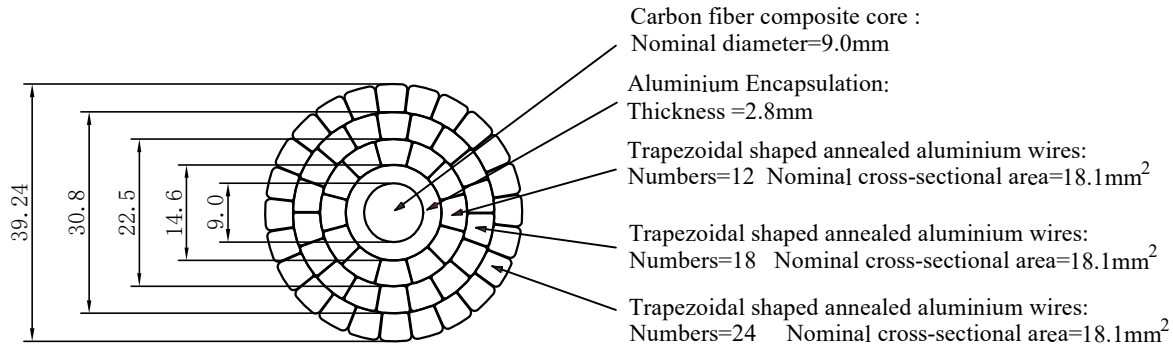

<b>TS Conductor Corp.</b>		
TS Blanca M3 9.0 (1.545) ID: 29621		
Design		
Check		
Ratify		