

DATA SHEET:

# TS Rincon M3 8 (0.977) 807



Governing Units: Metric

Mechanical Specifications	Metric		Imperial	
Fully Annealed Al Cross-sectional Area*	409.12	mm <sup>2</sup>	807.39	kcmil
Encapsulated Aluminum Cross-Sectional Area	86.58	mm <sup>2</sup>	0.13420	in <sup>2</sup>
Diameter of Composite Core (Exclude Encapsulation)	8.0	mm	0.31500	in
Cross-sectional Area of Core (Exclude Encapsulation)	50.30	mm <sup>2</sup>	0.07791	in <sup>2</sup>
Overall Diameter of Conductor	24.816	mm	0.977	in
Cross-sectional Area of the Conductor (Exclude Covering)	459.40	mm <sup>2</sup>	0.71206	in <sup>2</sup>
Ultimate Tensile Strength of Conductor 1) ,2)	162.85	kN	36.61	kip
Rated Strength of Core - 399 ksi (2750 MPa)	138.21	kN	31.07	kip
Core Mass per unit length (Exclude Encapsulation)	87.00	kg/km	58.47	lb/kft
Conductor Mass per unit length	1210.37	kg/km	813.47	lb/kft
Fully Annealed Al Mass per unit length (Include Encapsulation)**	1123.37	kg/km	755.00	lb/kft
Maximum Emergency Temperature at Surface 3)	200	°C	392	°F
Coefficient of Linear Expansion Above Thermal Kneepoint (core)	0.500	x10 <sup>-6</sup> /°C	0.278	x10 <sup>-6</sup> /°F
Coefficient of Linear Expansion Below Thermal Kneepoint (conductor)	17.445	x10 <sup>-6</sup> /°C	9.692	x10 <sup>-6</sup> /°F
Final Modulus of Elasticity Above Thermal Kneepoint (based on core area)	150.0	GPa	21.8	Msi
Final Modulus of Elasticity Below Thermal Kneepoint (based on conductor area)	66.1	GPa	9.6	Msi
Aluminum Heat Capacity	1048.8	Watt-s/m-°C	177.6	Watt-s/ft-°F
Core Heat Capacity	74.3	Watt-s/m-°C	12.6	Watt-s/ft-°F
Encapsulation Thickness	2.60	mm	0.10236	in
Stranding Ratio	1.0215			
Covered Thickness	0.000	mm	0.000	in
Electrical Specifications	Metric		Imperial	
DC Resistance at 20°C (Fully Annealed Al 63% IACS)	0.0680	ohm/km	0.1095	ohm/mile
DC Resistance at 25°C	0.0694	ohm/km	0.1117	ohm/mile
DC Resistance at 75°C	0.0833	ohm/km	0.1340	ohm/mile
Temperature Coefficient of Resistance at 20°C	0.00408	1/°C	0.00227	1/°F
Frequency	60	Hz	60	Hz
AC Resistance at 25°C	0.0705	ohm/km	0.1134	ohm/mile
AC Resistance at 75°C	0.0842	ohm/km	0.1355	ohm/mile
AC Resistance at 180°C	0.1129	ohm/km	0.1818	ohm/mile
Ampacity 4)		1522	@180°C, & A	
		1604	@200°C, & A	
GMR (estimated)	10.07	mm	0.0330	ft
Inductive Reactance (Xa: internal flux+external flux radius 1 ft)	0.2572	ohm/km	0.414	ohm/mile
Capacitive Reactance	0.1528	Mohm-km	0.095	Mohm-mile

\*TS Rincon M3 8 (0.977) 807 conductor is produced with Fully Annealed Al aluminum. The nominal Aluminum equivalent area is 409.1 sq. mm (807.4 kcmil)

\*\*TS® Conductors are required to exhibit lay lengths (ratios) that conform to established ACSR and ACSS standards.

- 1) Fully Annealed Al rated tensile strength based on applicable standard. Core tensile strength based on 100% of its strength.
- 2) Strength at ambient temperature, Strength may be reduced to Rated Core Strength when temperature is above knee point
- 3) Maximum continuous operating temperature of TS Rincon M3 8 (0.977) 807 is 180°C and a maximum emergency temperature of 200°C
- 4). Ampacity based on: 25°C ambient temperature, 2ft/s (0.6 m/s) perpendicular wind, 0.5 Emis 0.5 Absorb.60 Hz, sea level (0) elevation, 30°N line Azimuth, noon on June 10th (96W/sq.ft, 1033W/sq.m), clear atmosphere

The information contained herein is offered in good faith. All values are nominal unless specifically indicated as maximum or minimum. The actual configuration of a given size may vary between conductor manufacturers and may result in slight variations in some of the indicated values. Data herein is to be considered confidential and proprietary to TS Conductor


contact: info@tsconductor.com

ID:48096

Date Produced:

8/20/2024

# TS Conductor Cross sectional drawing

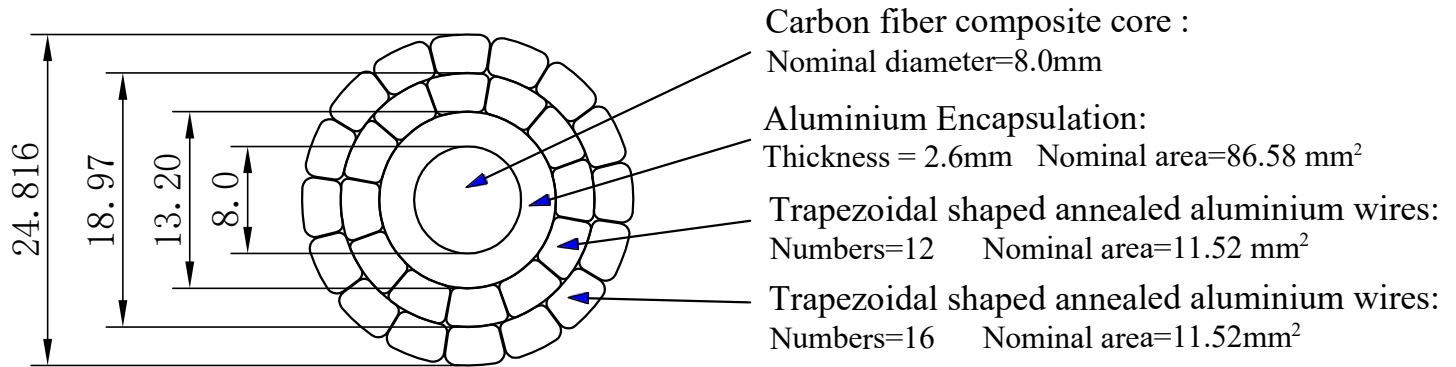

## TS Conductor Corp.

TS Rincon M3 8 (0.977) 807 ID:48096

Design		Date	
Check		Date	
Ratify		Date	