

DATA SHEET:

1360 KCMIL_KeyStone_AECC_TW_M3_TS



Governing Units: Metric

Mechanical Specifications	Metric		Imperial	
Fully Annealed Al Cross-sectional Area*	688.94	mm ²	1359.60	kcmil
Encapsulated Aluminum Cross-Sectional Area	112.97	mm ²	0.17511	in ²
Diameter of Composite Core (Exclude Encapsulation)	9.5	mm	0.37400	in
Cross-sectional Area of Core (Exclude Encapsulation)	70.90	mm ²	0.10987	in ²
Overall Diameter of Conductor	31.979	mm	1.259	in
Cross-sectional Area of the Conductor (Exclude Covering)	759.80	mm ²	1.17773	in ²
Ultimate Tensile Strength of Conductor 1) ,2)	235.80	kN	53.01	kip
Rated Strength of Core - 399 ksi (2750 MPa)	194.92	kN	43.82	kip
Core Mass per unit length (Exclude Encapsulation)	123.00	kg/km	82.67	lb/kft
Conductor Mass per unit length	2018.60	kg/km	1356.67	lb/kft
Fully Annealed Al Mass per unit length (Include Encapsulation)**	1895.60	kg/km	1274.00	lb/kft
Maximum Emergency Temperature at Surface 3)	200	°C	392	°F
Coefficient of Linear Expansion Above Thermal Kneepoint (core)	0.500	x10 ⁻⁶ /°C	0.278	x10 ⁻⁶ /°F
Coefficient of Linear Expansion Below Thermal Kneepoint (conductor)	18.133	x10 ⁻⁶ /°C	10.074	x10 ⁻⁶ /°F
Final Modulus of Elasticity Above Thermal Kneepoint (based on core area)	150.0	GPa	21.8	Msi
Final Modulus of Elasticity Below Thermal Kneepoint (based on conductor area)	64.3	GPa	9.3	Msi
Aluminum Heat Capacity	1766.0	Watt-s/m-°C	299.0	Watt-s/ft-°F
Core Heat Capacity	104.8	Watt-s/m-°C	17.8	Watt-s/ft-°F
Encapsulation Thickness	2.90	mm	0.11417	in
Stranding Ratio	1.0235			
Covered Thickness	0.000	mm	0.000	in
Electrical Specifications	Metric		Imperial	
DC Resistance at 20°C (Fully Annealed Al 63% IACS)	0.0405	ohm/km	0.0652	ohm/mile
DC Resistance at 25°C	0.0413	ohm/km	0.0665	ohm/mile
DC Resistance at 75°C	0.0496	ohm/km	0.0798	ohm/mile
Temperature Coefficient of Resistance at 20°C	0.00408	1/°C	0.00227	1/°F
Frequency	60	Hz	60	Hz
AC Resistance at 25°C	0.0432	ohm/km	0.0695	ohm/mile
AC Resistance at 75°C	0.0511	ohm/km	0.0823	ohm/mile
AC Resistance at 180°C	0.0679	ohm/km	0.1093	ohm/mile
Ampacity 4)		2127	@180°C, & A	
		2247	@200°C, & A	
GMR (estimated)	12.89	mm	0.0423	ft
Inductive Reactance (Xa: internal flux+external flux radius 1 ft)	0.2385	ohm/km	0.384	ohm/mile
Capacitive Reactance	0.1407	Mohm-km	0.087	Mohm-mile

*1360 KCMIL_KeyStone_AECC_TW_M3_TS conductor is produced with Fully Annealed Al aluminum. The nominal Aluminum equivalent area is 688.9 sq. mm (1359.6 kcmil)

**TS® Conductors are required to exhibit lay lengths (ratios) that conform to established ACSR and ACSS standards.

- 1) Fully Annealed Al rated tensile strength based on applicable standard. Core tensile strength based on 100% of its strength.
- 2) Strength at ambient temperature, Strength may be reduced to Rated Core Strength when temperature is above knee point
- 3) Maximum continuous operating temperature of 1360 KCMIL_KeyStone_AECC_TW_M3_TS is 180°C and a maximum emergency temperature of 200°C
- 4). Ampacity based on: 25°C ambient temperature, 2ft/s (0.6 m/s) perpendicular wind, 0.5 Emis 0.5 Absorb. 60 Hz, sea level (0) elevation, 30°N line Azimuth, noon on June 10th (96W/sq.ft, 1033W/sq.m), clear atmosphere

The information contained herein is offered in good faith. All values are nominal unless specifically indicated as maximum or minimum. The actual configuration of a given size may vary between conductor manufacturers and may result in slight variations in some of the indicated values. Data herein is to be considered confidential and proprietary to TS Conductor

contact: info@tsconductor.com


ID:29633

Date Produced:

6/3/2025

TS[®] Conductor Cross sectional drawing

Expected value at production time

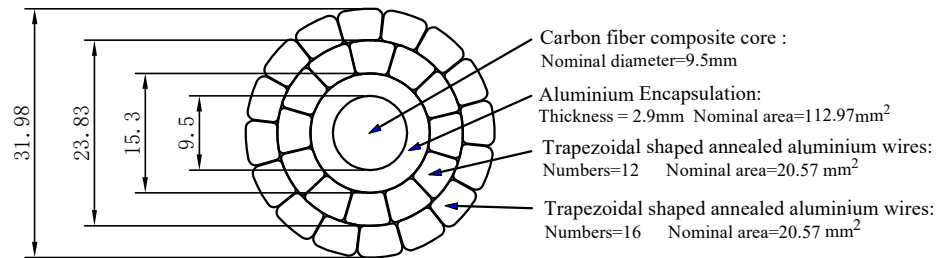

TS Conductor Corp.

TS Sierra M3 9.5 (1.259) 1360 ID: 29633

Design

Check

Ratify