

DATA SHEET:

TS Helvellyn M3 11.5 (39.300) IEC 2074



Governing Units: Metric

Mechanical Specifications	Metric		Imperial	
Fully Annealed Al Cross-sectional Area*	1050.81	mm ²	2073.75	kcmil
Encapsulated Aluminum Cross-Sectional Area	136.66	mm ²	0.21182	in ²
Diameter of Composite Core (Exclude Encapsulation)	11.5	mm	0.45300	in
Cross-sectional Area of Core (Exclude Encapsulation)	103.90	mm ²	0.16100	in ²
Overall Diameter of Conductor	39.300	mm	1.547	in
Cross-sectional Area of the Conductor (Exclude Covering)	1154.70	mm ²	1.78976	in ²
Ultimate Tensile Strength of Conductor 1) ,2)	347.32	kN	78.08	kip
Rated Strength of Core - 399 ksi (2750 MPa)	285.62	kN	64.21	kip
Core Mass per unit length (Exclude Encapsulation)	181.00	kg/km	121.65	lb/kft
Conductor Mass per unit length	3083.91	kg/km	2072.65	lb/kft
Fully Annealed Al Mass per unit length (Include Encapsulation)**	2902.91	kg/km	1951.00	lb/kft
Maximum Emergency Temperature at Surface 3)	200	°C	392	°F
Coefficient of Linear Expansion Above Thermal Kneepoint (core)	0.500	x10 ⁻⁶ /°C	0.278	x10 ⁻⁶ /°F
Coefficient of Linear Expansion Below Thermal Kneepoint (conductor)	18.267	x10 ⁻⁶ /°C	10.149	x10 ⁻⁶ /°F
Final Modulus of Elasticity Above Thermal Kneepoint (based on core area)	150.0	GPa	21.8	Msi
Final Modulus of Elasticity Below Thermal Kneepoint (based on conductor area)	63.7	GPa	9.2	Msi
Aluminum Heat Capacity	2693.7	Watt-s/m-°C	456.1	Watt-s/ft.°F
Core Heat Capacity	153.6	Watt-s/m-°C	26.0	Watt-s/ft.°F
Encapsulation Thickness	3.00	mm	0.11811	in
Stranding Ratio	1.0275			
Covered Thickness	0.000	mm	0.000	in
Electrical Specifications	Metric		Imperial	
DC Resistance at 20°C (Fully Annealed Al 63% IACS)	0.0267	ohm/km	0.0429	ohm/mile
DC Resistance at 25°C	0.0272	ohm/km	0.0438	ohm/mile
DC Resistance at 75°C	0.0326	ohm/km	0.0525	ohm/mile
Temperature Coefficient of Resistance at 20°C	0.00408	1/°C	0.00227	1/°F
Frequency	50	Hz	50	Hz
AC Resistance at 25°C	0.0291	ohm/km	0.0469	ohm/mile
AC Resistance at 75°C	0.0343	ohm/km	0.0552	ohm/mile
AC Resistance at 180°C	0.0451	ohm/km	0.0726	ohm/mile
Ampacity 4)		2788	@180°C, & A	
		2951	@200°C, & A	
GMR (estimated)	15.83	mm	0.0519	ft
Inductive Reactance (Xa: internal flux+external flux radius 1 ft)	0.1858	ohm/km	0.299	ohm/mile
Capacitive Reactance	0.1570	Mohm-km	0.098	Mohm-mile

*TS Helvellyn M3 11.5 (39.300) IEC 2074 conductor is produced with Fully Annealed Al aluminum. The nominal Aluminum equivalent area is 1050.8 sq. mm (2073.7 kcmil)


**TS® Conductors are required to exhibit lay lengths (ratios) that conform to established ACSR and ACSS standards.

- 1) Fully Annealed Al rated tensile strength based on applicable standard. Core tensile strength based on 100% of its strength.
- 2) Strength at ambient temperature. Strength may be reduced to Rated Core Strength when temperature is above knee point
- 3) Maximum continuous operating temperature of TS Helvellyn M3 11.5 (39.300) IEC 2074 is 180°C and a maximum emergency temperature of 200°C
- 4). Ampacity based on: 25°C ambient temperature, 2ft/s (0.6 m/s) perpendicular wind, 0.5 Emis 0.5 Absorb.50 Hz, sea level (0) elevation, 30°N line Azimuth, noon on June 10th (96W/sq.ft, 1033W/sq.m), clear atmosphere

The information contained herein is offered in good faith. All values are nominal unless specifically indicated as maximum or minimum. The actual configuration of a given size may vary between conductor manufacturers and may result in slight variations in some of the indicated values. Data herein is to be considered confidential and proprietary to TS Conductor

TS[®] Conductor Cross sectional drawing

Expected value at production time

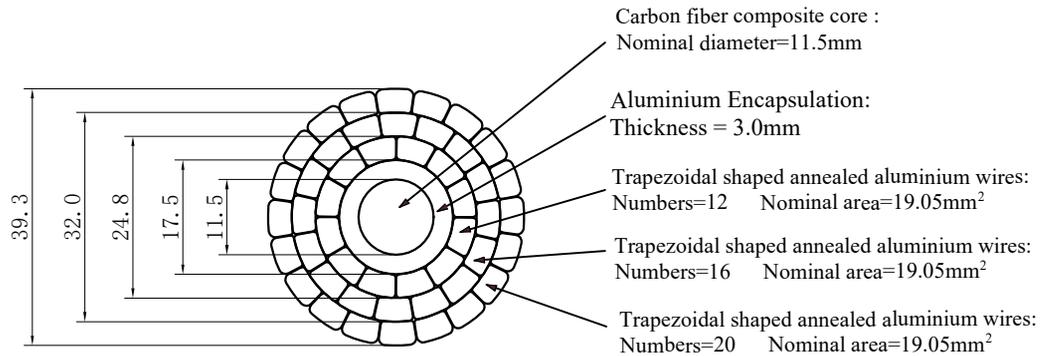

TS Conductor Corp.		
TS Helvellyn M3 11.5(39.3) ID: 48058		
Design		
Check		
Ratify		